


# M Range Technical Data

## Performance Data


Pump	r.p.m.	0 bar 0lb/in <sup>2</sup>		1.4 bar 20lb/in <sup>2</sup>		2.4 bar 35lb/in <sup>2</sup>		2.75 bar 40lb/in <sup>2</sup>		3.45 bar 50lb/in <sup>2</sup>		Weight kg
		l/h	gal/h	l/h	gal/h	l/h	gal/h	l/h	gal/h	l/h	gal/h	
MS	1450	750	165	500	110	409	90	386	85	318	68	15
MM	1450	1590	350	1250	275	1050	231	1000	220	900	198	17
ML	2850	3130	690	2470	543	2040	450	1890	416	1590	350	18

## Dimensions

### MS Pumps

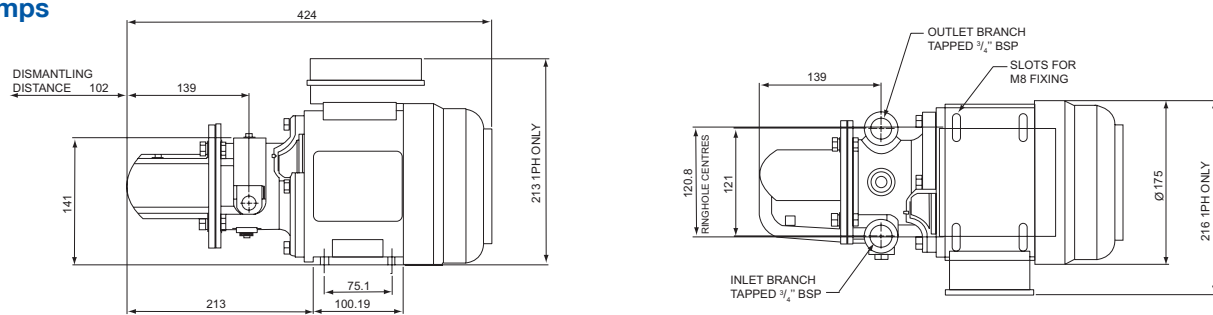

### MM/ML Pumps

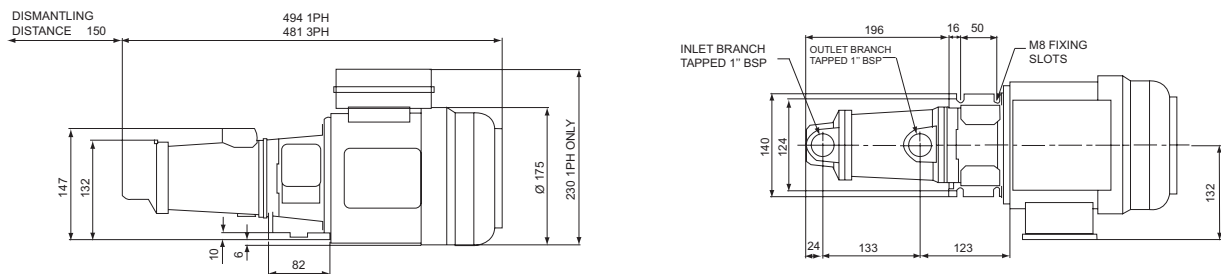

\* All dimensions in mm's, (unless otherwise stated) and for guidance only. Please contact Mono for full certified drawings.

## Drive Motor Details

MS	0.18kW Single/Three Phase	110/230/380/415V 50 Hz
MM	0.37kW Single/Three Phase	110/230/415V 50 Hz
ML	0.55kW Three Phase	415V 50 Hz
ML	0.75kW Single Phase	230V 50 Hz

\*All motors supplied with IP55 enclosure as standard, with others available

## Suction Lifts

Pump	m	ft
MS	8	26
MM	7.5	25
ML	5.5	17.5



One Company, Unlimited Solutions